


vCam Wi-Fi Adapter Camera Test Lead Quick Guide V1.0

The Wi-Fi Adapter Camera Test Lead allows for the testing of the vCam camera heads while not attached to its reel.

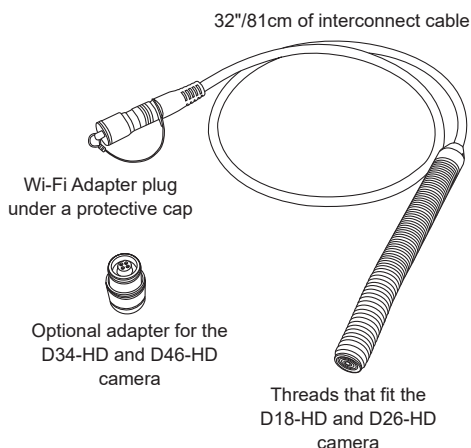


Tools needed:

- vCam Wi-Fi Adapter
- Camera test lead, PN 2.114.03.00025
- D34-HD/D46-HD camera head adapter (if needed), PN 2.114.03.00026
- vCam Mobile Controller App running on a tablet or phone
- Sonde locator with 512/640Hz or 33kHz frequencies

Note: By default, the D18-HD and D26-HD camera heads fit the spring supplied with the wi-fi adapter. You will need the adapter to test the larger D34-HD or D46-HD camera heads.

1. Remove the protective cap from the test lead plug by pulling down on the connector housing while pulling up on the cap.
2. Line up the red dot of the plug with the socket's red dot and insert the plug.

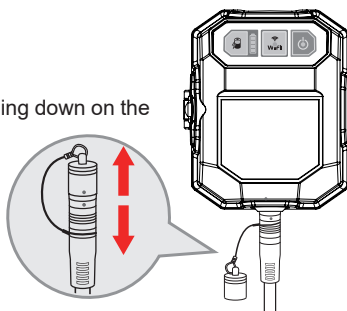

3. Attach the D18-HD or D26-HD camera head to the spring. If testing the larger D34-HD or D46-HD camera heads, you will need to attach the adapter, PN 2.114.03.00026, to fit these camera heads.
4. Power on the Wi-Fi Adapter.
5. Connect to the vCam Wi-Fi Adapter through the vCam Mobile Controller (VMC) App.
6. If the camera head is operational, the picture will be seen in the VMC app, and you will have control of the camera head's LEDs by using that feature in the app.
7. Activate the Sonde feature in the app. Use a sonde locator to confirm the sonde in the spring is responding.



Vivax-Metrotech Corporation (Headquarters)

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free: 1-800-446-3392

Tel: +1-408-734-3880

Fax: +1-408-904-4964

Email: SalesUSA@vxmt.com

Website: www.vivax-metrotech.com

Visit us at www.vivax-metrotech.com to view our full product line and worldwide locations.